



LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services)



Elitech®



Elitech Dry Ice Single-use USB Temperature Data Logger -85°C~50°C, 30 Days(Logging interval 5 min), 16000 Points, Shadow Data, PDF Report, LogEt 6 PT



CONTACT US:

7806070680

Invcorpbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com




LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services)



Elitech®

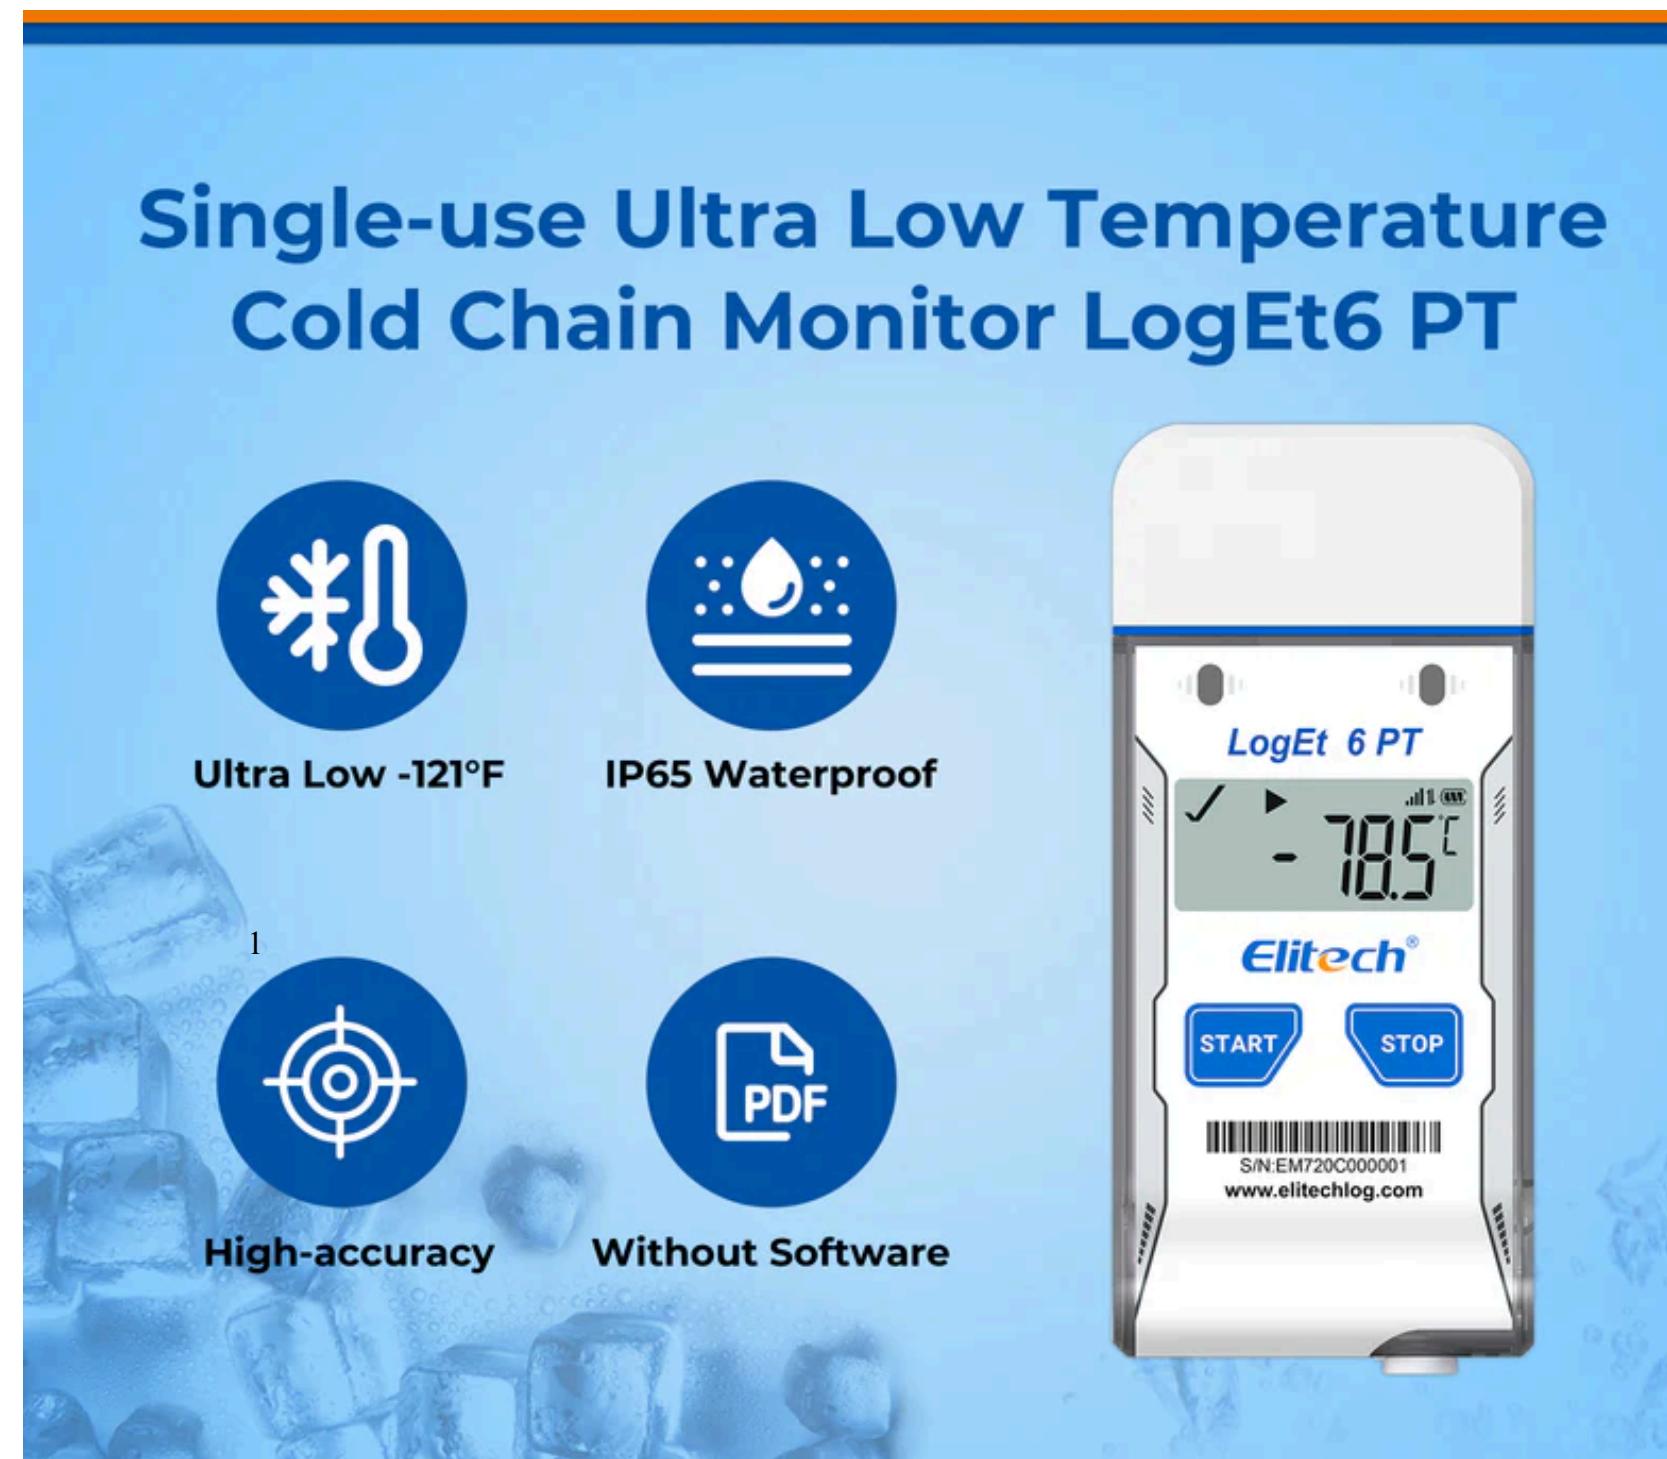

Features Of Elitech Temperature Datalogger:

- This Single-use temperature data logger has 16,000 recording points, up to 2 years of working life
 - A wide measuring range: -22°F~158°F; accuracy: $\pm 0.9^{\circ}\text{F}$.
- A built-in USB connector, no cable or reader required to download data or generate a PDF report
- 4 different customizable alarm settings, provide flexible ways to monitor, ship, and store temperature-sensitive products.
 - Powerful LCD indication, easy to view temperature data, alarm status, etc.
- IP65 protection grade and up to 5 temperature alarms, suitable to use on temperature-sensitive products such as foods, drugs, etc.



LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services)



— Elitech®

Auto-Generated PDF & CSV Files

No Software Required

PDF CSV



Ultra-low Temperature Freezer



Dry ice Transportation



Refrigerated Truck



Refrigerated Container



LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services)





Elitech®



LogET 6 User Manual

Report

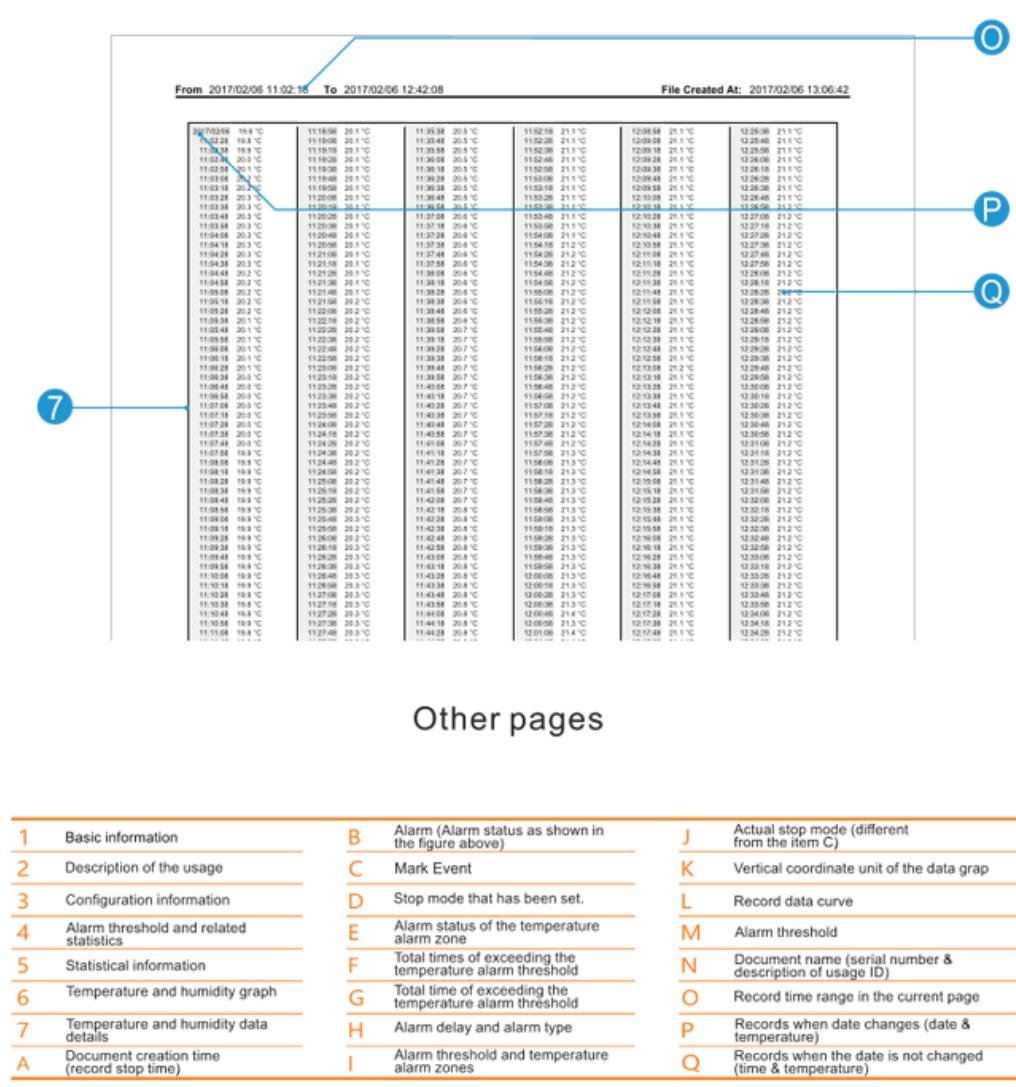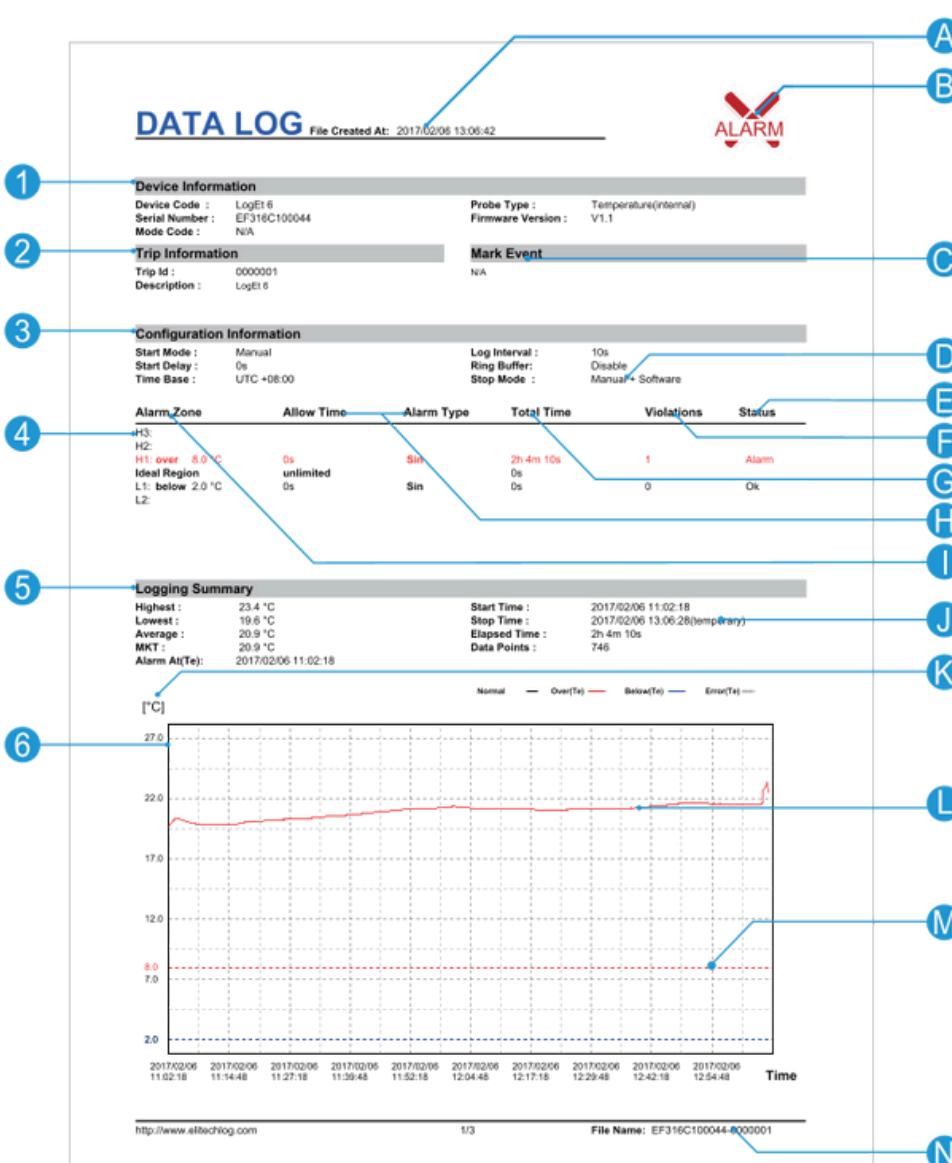



LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services)



Elitech®

Elitech LogEt 6 Temperature Datalogger is a single-use temperature data logger with a built-in NTC thermistor. The simple design with IP65 protection makes LogEt 6 a perfect choice for most cold chain management processes. Elitech Temperature Datalogger features an LCD screen display for easy reading and a single-use 3.6V Lithium battery that lasts for 2 years, enabling it to use for long-duration shipments.

Product Overview

The data logger is mainly used to record the temperature of food in storage and transportation. It helps accurately monitor the whole process to indicate whether food is safe and fresh.

Structure Description

- 1 USB Port
- 2 LCD Screen
- 3 Configuration Info Label
- 4 Buttons
- 5 Sensor
- 6 Barcode Label



Technical Parameters

Recording Options	Single-Use	Certifications	EN12830, CE, RoHS
Temperature Range	-30°C to 70°C	Validation Certificate	Hardcopy
Temperature Accuracy	±0.5(-20°C/+40°C);±1.0(others range)	Software	PDF /ElitechLog Win or Mac (latest version)
Temperature Resolution	0.1°C	Report Generation	Automatic PDF report
Data Storage Capacity	16,000 readings	Password Protection	Optional on request
Shelf Life/Battery	2 years'/ER14250 3.6V lithium battery	Connection Interface	USB 2.0, A-Type
Recording Interval	10 minutes(standard, others on request)	Alarm Configuration	Optional, up to 5 points
Recording Duration	up to 110 days*(standard, others on request)	Reprogrammable	With free Elitech Win or MAC software
Startup Mode	Button or software	Dimensions	100mmx46mmx19mm(LxWxH)
Stop Mode	Button, software or stop when full	Weight	60g
Protection Class	IP67		

1.Depending on optimal storage conditions(±15°C to +23°C/45% to 75% RH)

2.Depending on application temperature(very low/ high temperatures may shorten it)

Parameter Instruction

Users can reconfigure parameters via the data management software. The reconfiguration will clear the original parameters and data

Alarm threshold	The logger supports three upper limits and two lower limits
Alarm zone	The range that is out of alarm thresholds
Alarm type	Single The logger records the single time for continuous out-of-limit events
	Cumulative The data logger records the cumulative time of all the out-of-limit events.
Alarm delay	The logger does not alarm immediately when the temperature is within the alarm zone. It begins to alarm only when the alarm delay time elapses
MKT	Mean kinetic temperature is an evaluation method that indicates the effect of temperature fluctuation on stored articles

www.elitechlog.com

Software download: www.elitechlog.com/softwares

Operating Instructions

Action	Operation
Start the data logger	Press and hold the start button for about 5 seconds
1 Stop the data logger	Press and hold the stop button for about 5 seconds
Show status	Press and release the start button
Set Mark	Press and hold the start button for about 5 seconds

View data After the data logger is plugged into a computer USB port, a PDF data report will be created automatically. The LCD screen will display report generation progress. When created, the report can be viewed. The creation will not last for more than 4 minutes.

Description of the menus

Menu	Description	Example	Menu	Description	Example
1	Timing start	28	9	Upper limit 3	600
	Delayed start	28	10	Upper limit 2	500
2	Not started	28	11	Upper limit 1	400
3	Start status	308	12	Lower limit 1	10
4	Readings	16000	13	Lower limit 2	-20
5	Max temperature	588	14	Current time	170220
6	Min temperature	28	15	Sensor fault	Err
7	MKT value	80	16	PDF creation progress	PDF 88
8	Average temperature	80			

Description of the combined indicators and other status

Display	Description	Display	Description
(group)	No alarm		Mark
(group)	Alarmed		Data clear
(group)	Min		USB communicating
(group)	Max		

www.elitechlog.com

Software download: www.elitechlog.com/softwares

CONTACT US:

7806070680

lnvcorpjhansi@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com