



# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

**Elitech GSP-6 Digital Temperature and Humidity Data Logger Detachable Dual Probes -40°F to 158°F Max Accuracy up to  $\pm 0.6^\circ\text{F}$  Audio Alarm Calibration Certificate Max/Min Value Display**

1



**CONTACT US:**

7806070680

lnvcorpbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com



# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

### High precision temp and humidity probe

Accurately sense small changes in temperature

0.3°C  
High Precision

3m/Φ2  
TPE Medical-grade Line

IP67  
Waterproof Grade



Elitech GSP-6 Temperature and Humidity Data logger conforms to the GSP standard of the new edition. It has one big LCD screen, a button, an External temperature Sensor, and an external humidity sensor. with two modes to save data: Full record stop and cyclic record, the datalogger has the function of over limit sound-light alarm. It can also automatically shorten the record interval in case of over-temperature and humidity limits.



CONTACT US:

7806070680

lvncorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com





# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )




## Elitech®

### Max & Min Measuring Range Large Record Capacity



Temperature: -40°F ~ 185°F  
Humidity: 10% ~ 99%  
Record CAP: 16,000 points(MAX)  
Record INR: 10s ~ 24h available



#### Feature of Elitech GSP-6 Temperature and Humidity Data logger:

**Large record capacity**–Up to 16000 Temperature and Humidity readings for worry-free usage.

**Temperature & Humidity**– Equipped with one external temperature sensor and one external temperature-humidity combined sensor for 3 different temperature-humidity measuring types (set via Elitech Software).

**Multiple alarm Modes**– Multiple over-limit alarm modes: sound, light, and screen display alarm.

**Easy to Read**– Large LCD display for easy reading of the temperature and humidity data, alarm status etc.



**CONTACT US:**

7806070680

✉ [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)





# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

### Export Data from Software Visible and Audible Alarm



 ALARM


 ER14505

 USB



### Large Capacity Data Storage

16000 points storage capacity  
Continuous recording for 2 years at a 1 hour cycle  
Data can be cleared and reused when capacity is full

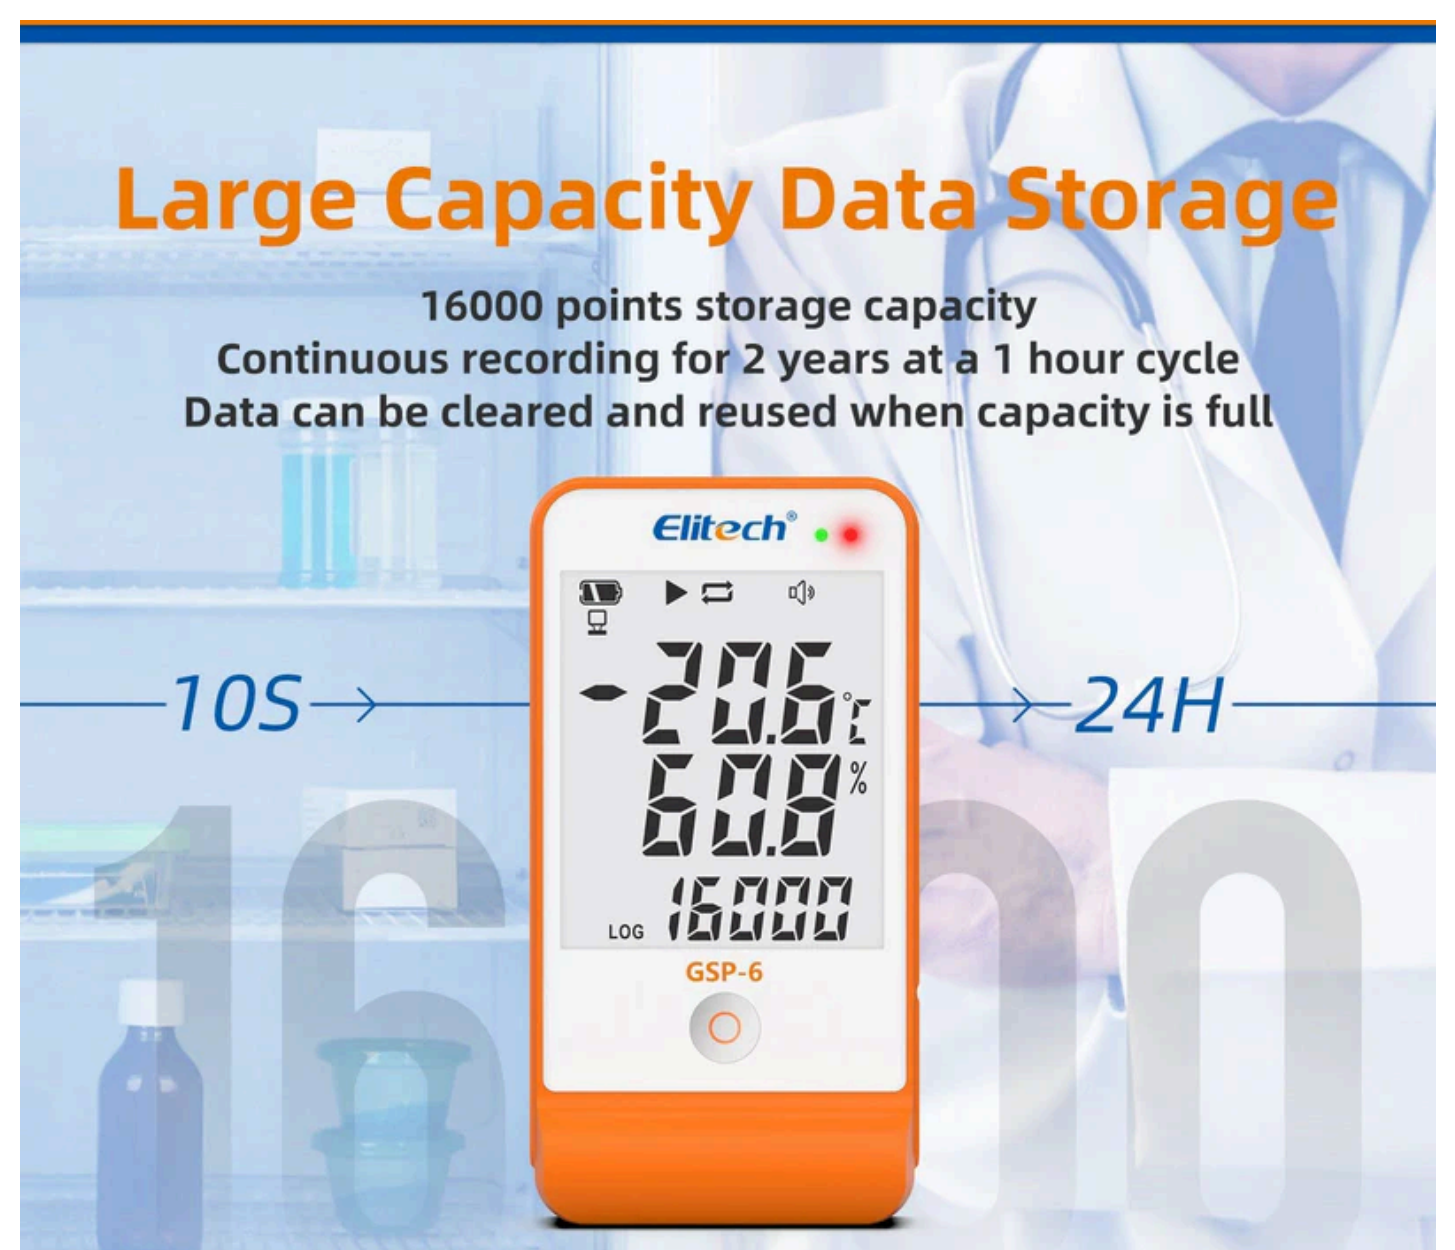

CONTACT US:

 7806070680

 [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)








# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

### What Elitechlog Can Offer

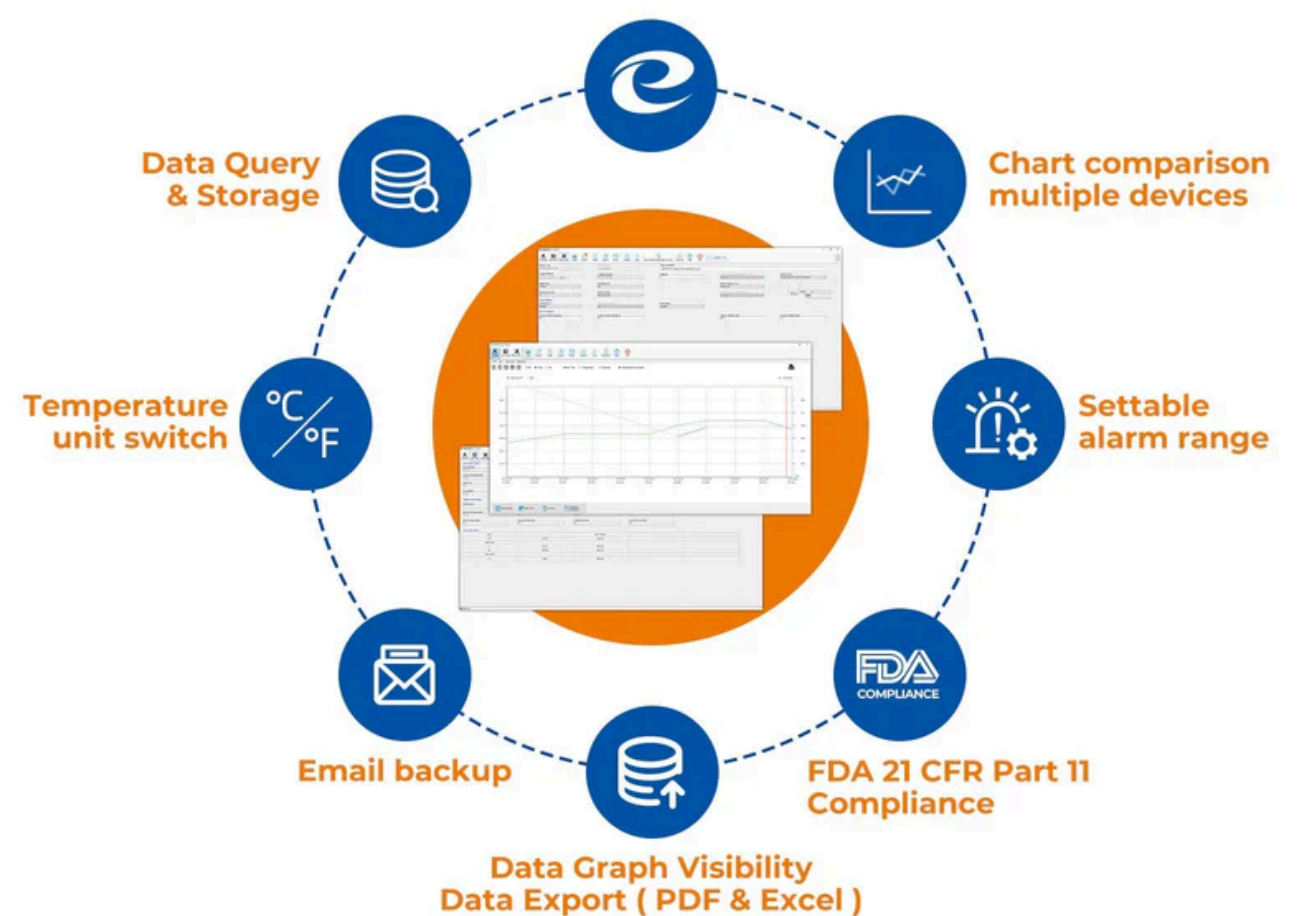

1



CONTACT US:

7806070680

lnvcorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com







# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

**Applications: Refrigerator trucks, cooler bags, cooler closets, drug closets, cold storage, laboratories.**

### Specifications

Manufacturer	Elitech
Model No	GSP-6 Temperature & Humidity Datalogger
Measuring Parameters	Temperature And Humidity
Temperature Range	-40°C~85°C
Temperature Accuracy	±0.5°C (-20°C~40°C)±0.1°C(other)
Temperature Resolution	0.1°C
Humidity Range	10 %~99 %
Humidity Accuracy	±3 % RH (25°C, 20%~90% RH); ±5% RH°C (other)
Humidity Resolution	0.1 % RH
Ambient Temperature	-30°C~70°C.
Display	2.8" LCD Screen
Logging Interval	10s to 24hours
Alarm Type	Sound & Light
Memory Capacity	Maximum 16,000 Points
Data Interface	Micro USB
Power Supply	Single-use 3.6V CR14505 lithium battery or powered via USB
Supply Scope	1x Data logger 1x USB Cable 1x Temperature Sensor(2m) 1x Humidity Sensor (2m) 1x User Manual 1x 3.7 Lithium Battery
Certifications	EN12830, CE, RoHS
Dimension	165 x 99 x 66mm

**CONTACT US:**

☎ 7806070680

✉ [lnvcorpbhopal@gmail.com](mailto:lnvcorpbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)

