




# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

### 4G or WiFi Real-Time Temperature Humidity CO2 Digital Data Logger – US-RCW-360Pro-4G-DC

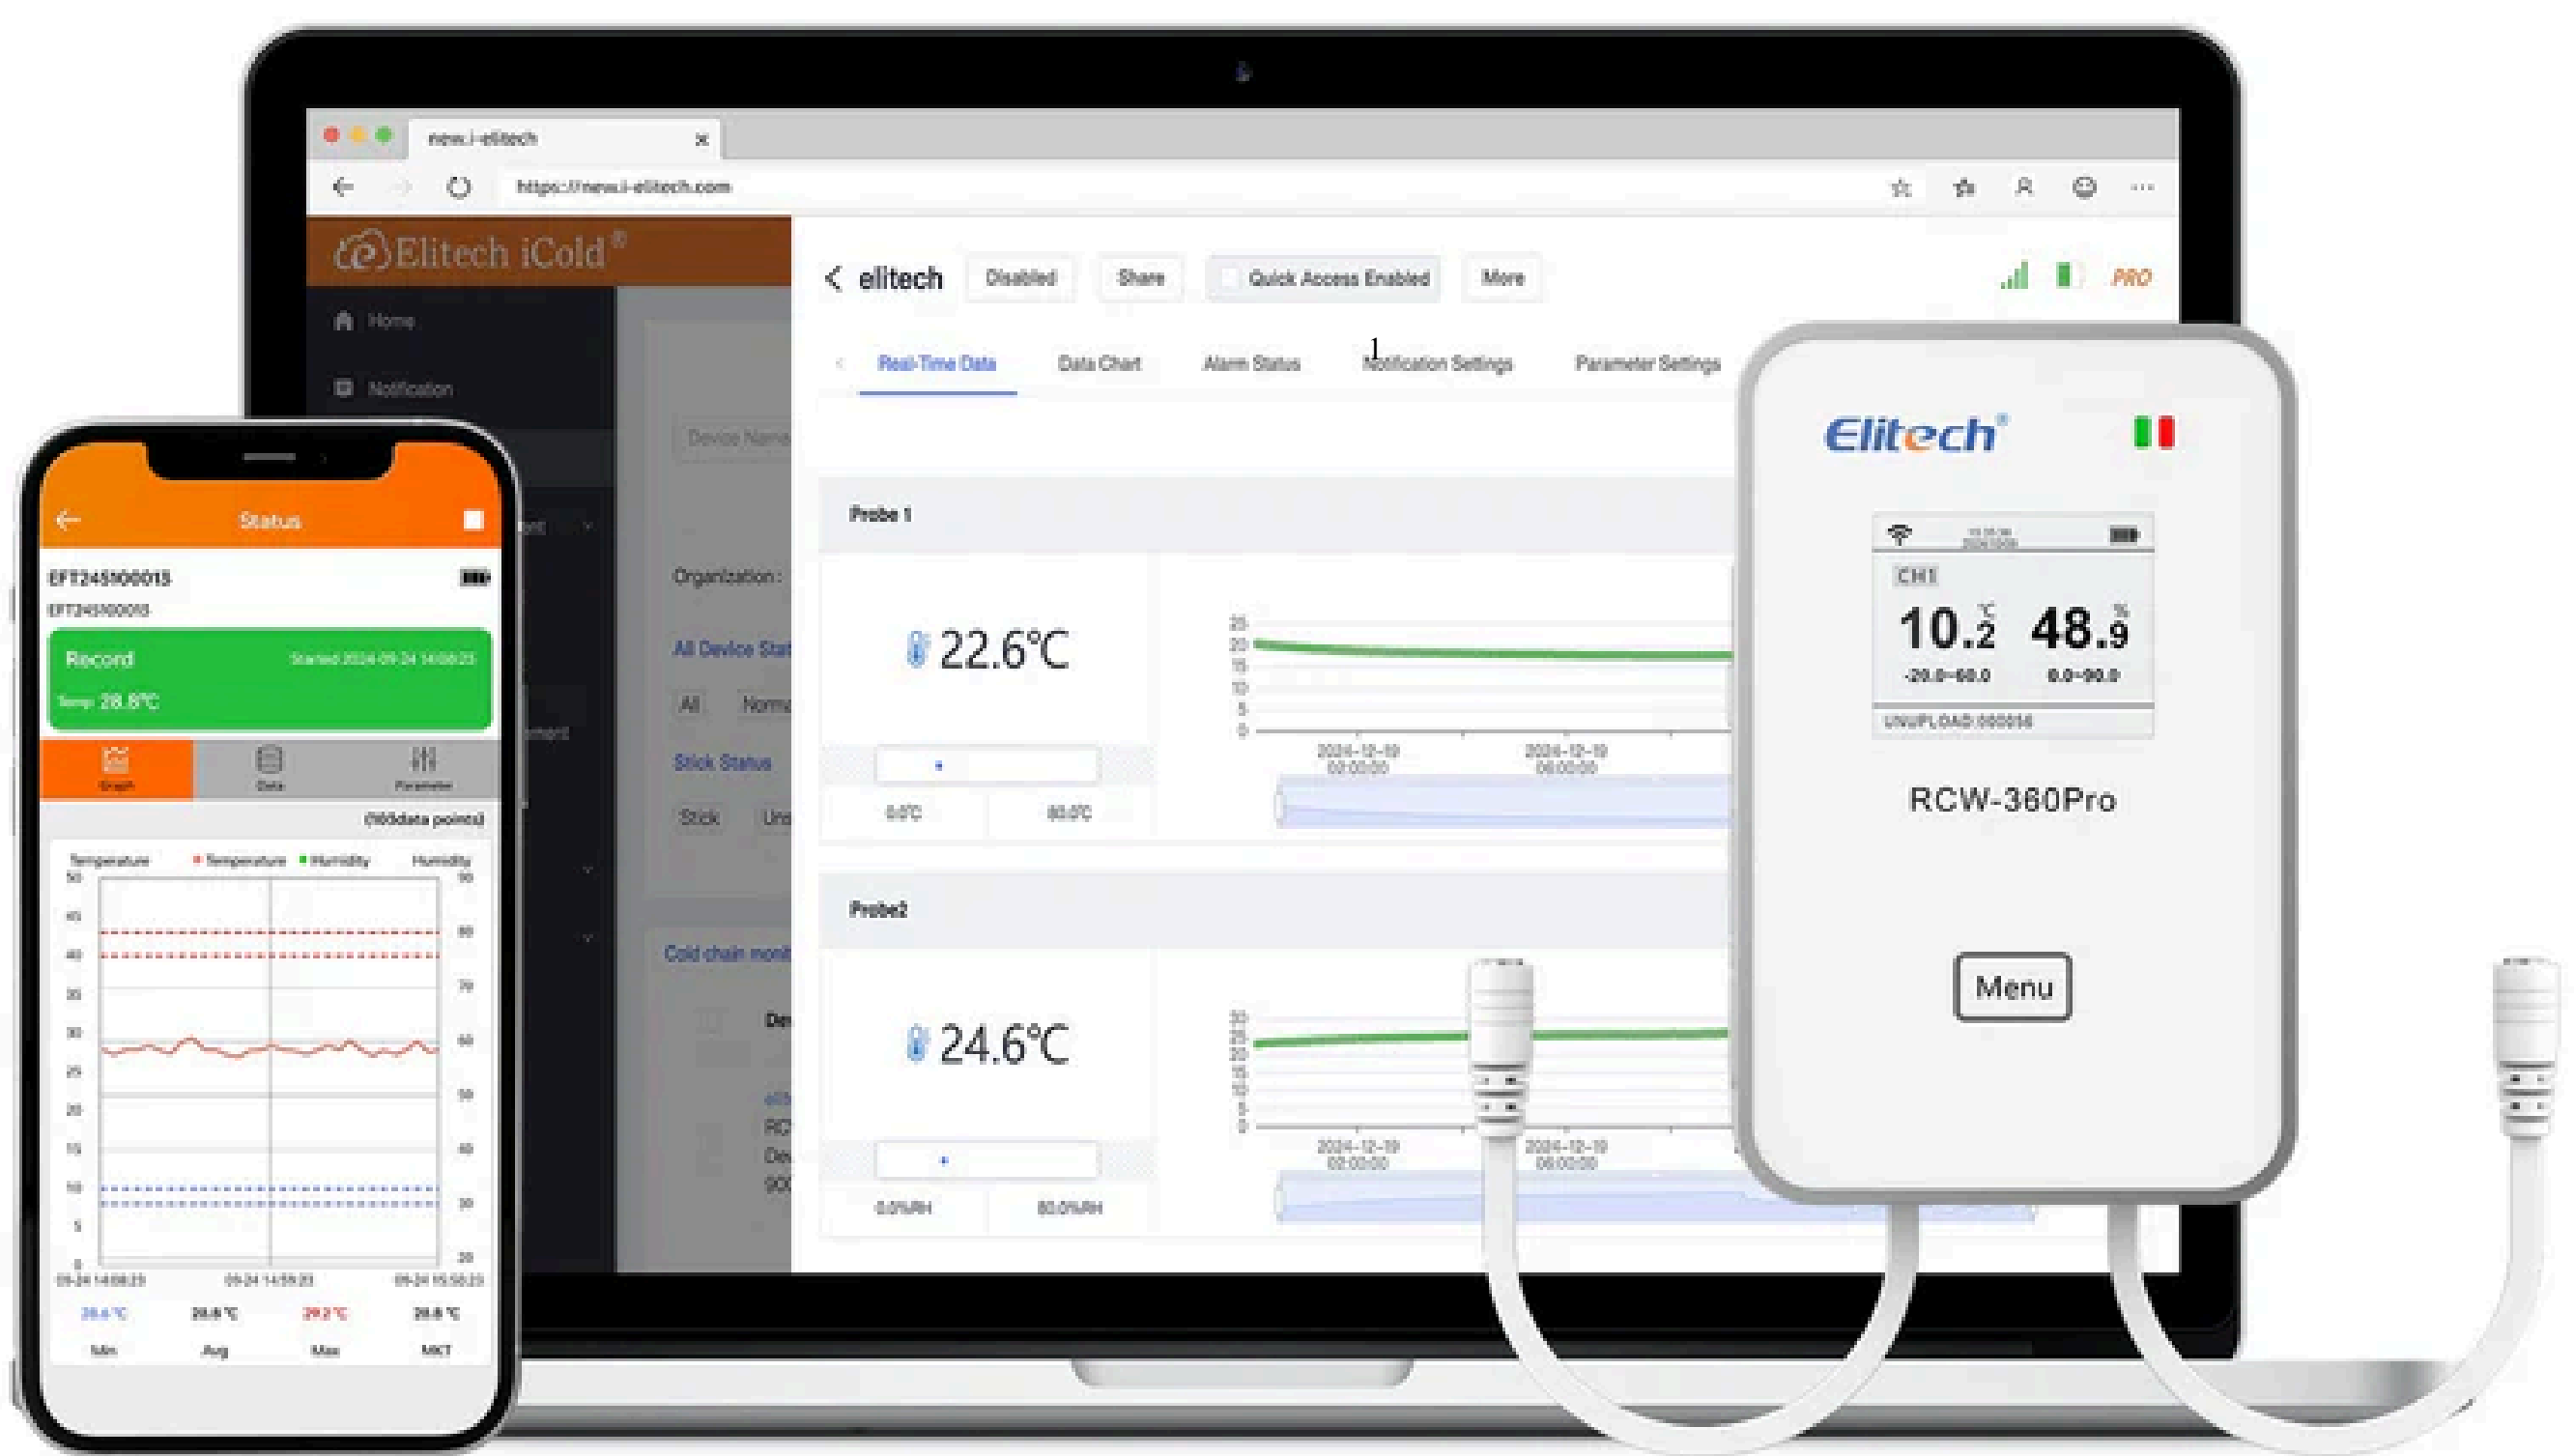

CONTACT US:

7806070680

lvncorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com



# LVN CORPORATION


(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®



1

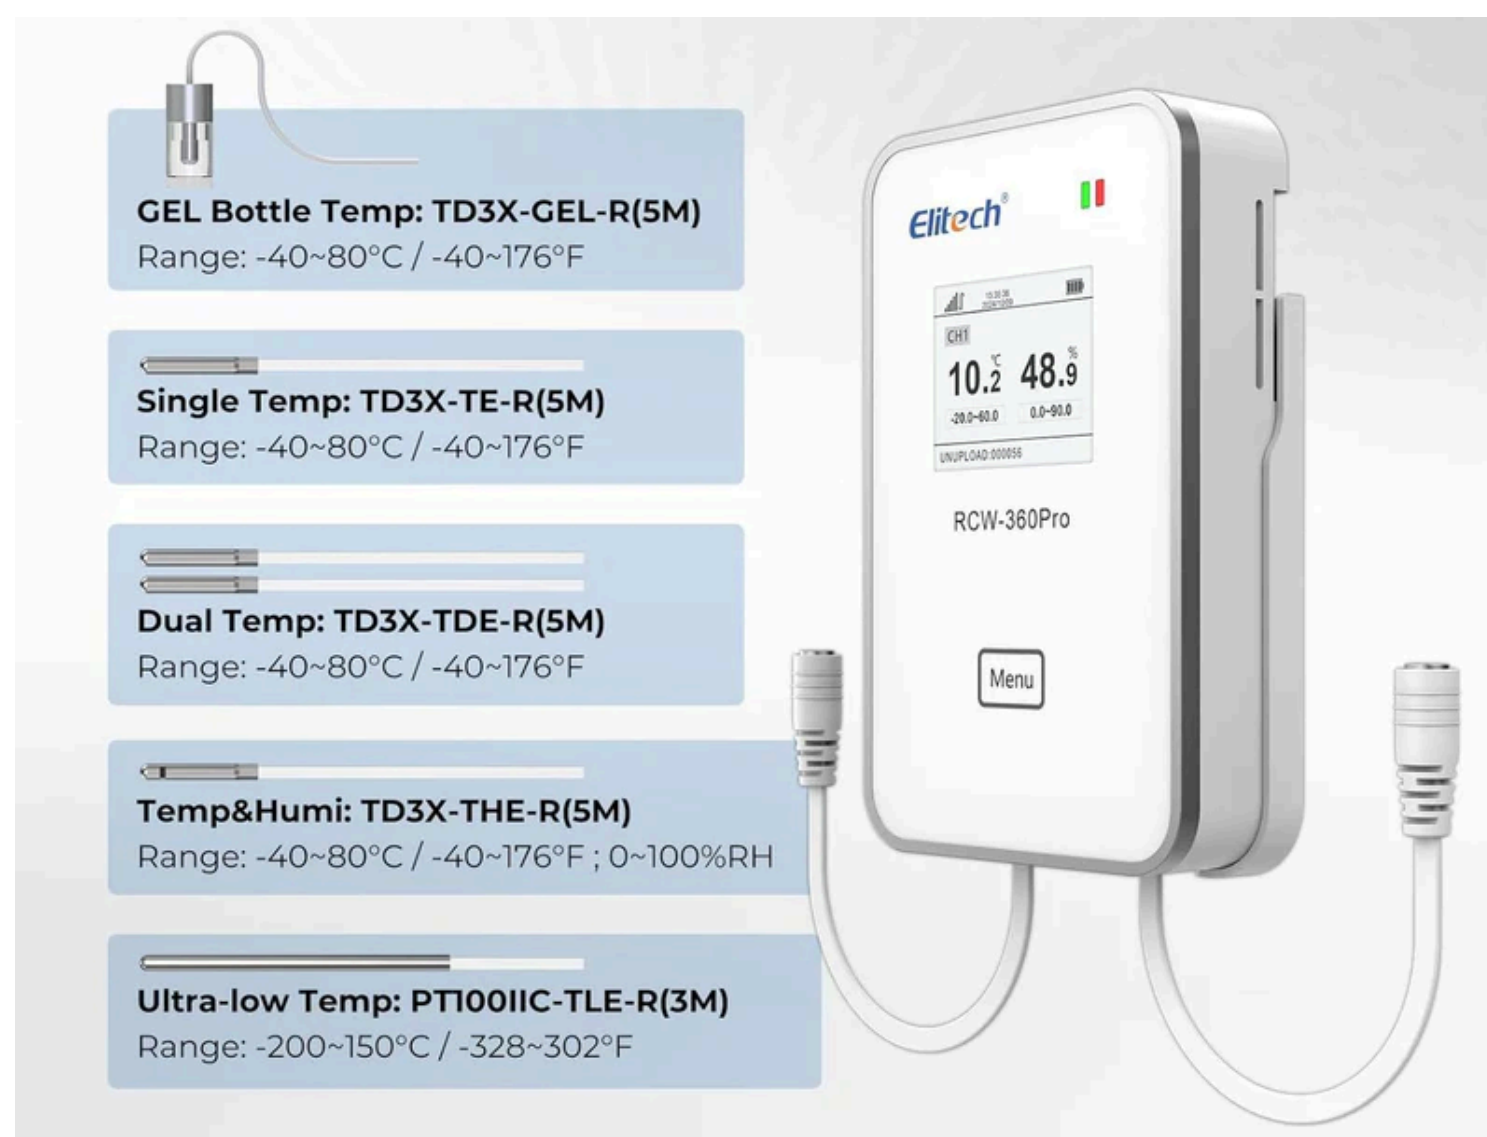

CONTACT US:

7806070680

lvncorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com








# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

4G or WiFi Real-Time  
Temperature  
Humidity CO2 Digital Data  
Logger  
Diverse Replaceable Probes  
100000 Points  
Cloud Data Storage  
SMS/Email/APP/Web Alarm  
Dual External Expansion Channel  
RCW-360Pro-DC

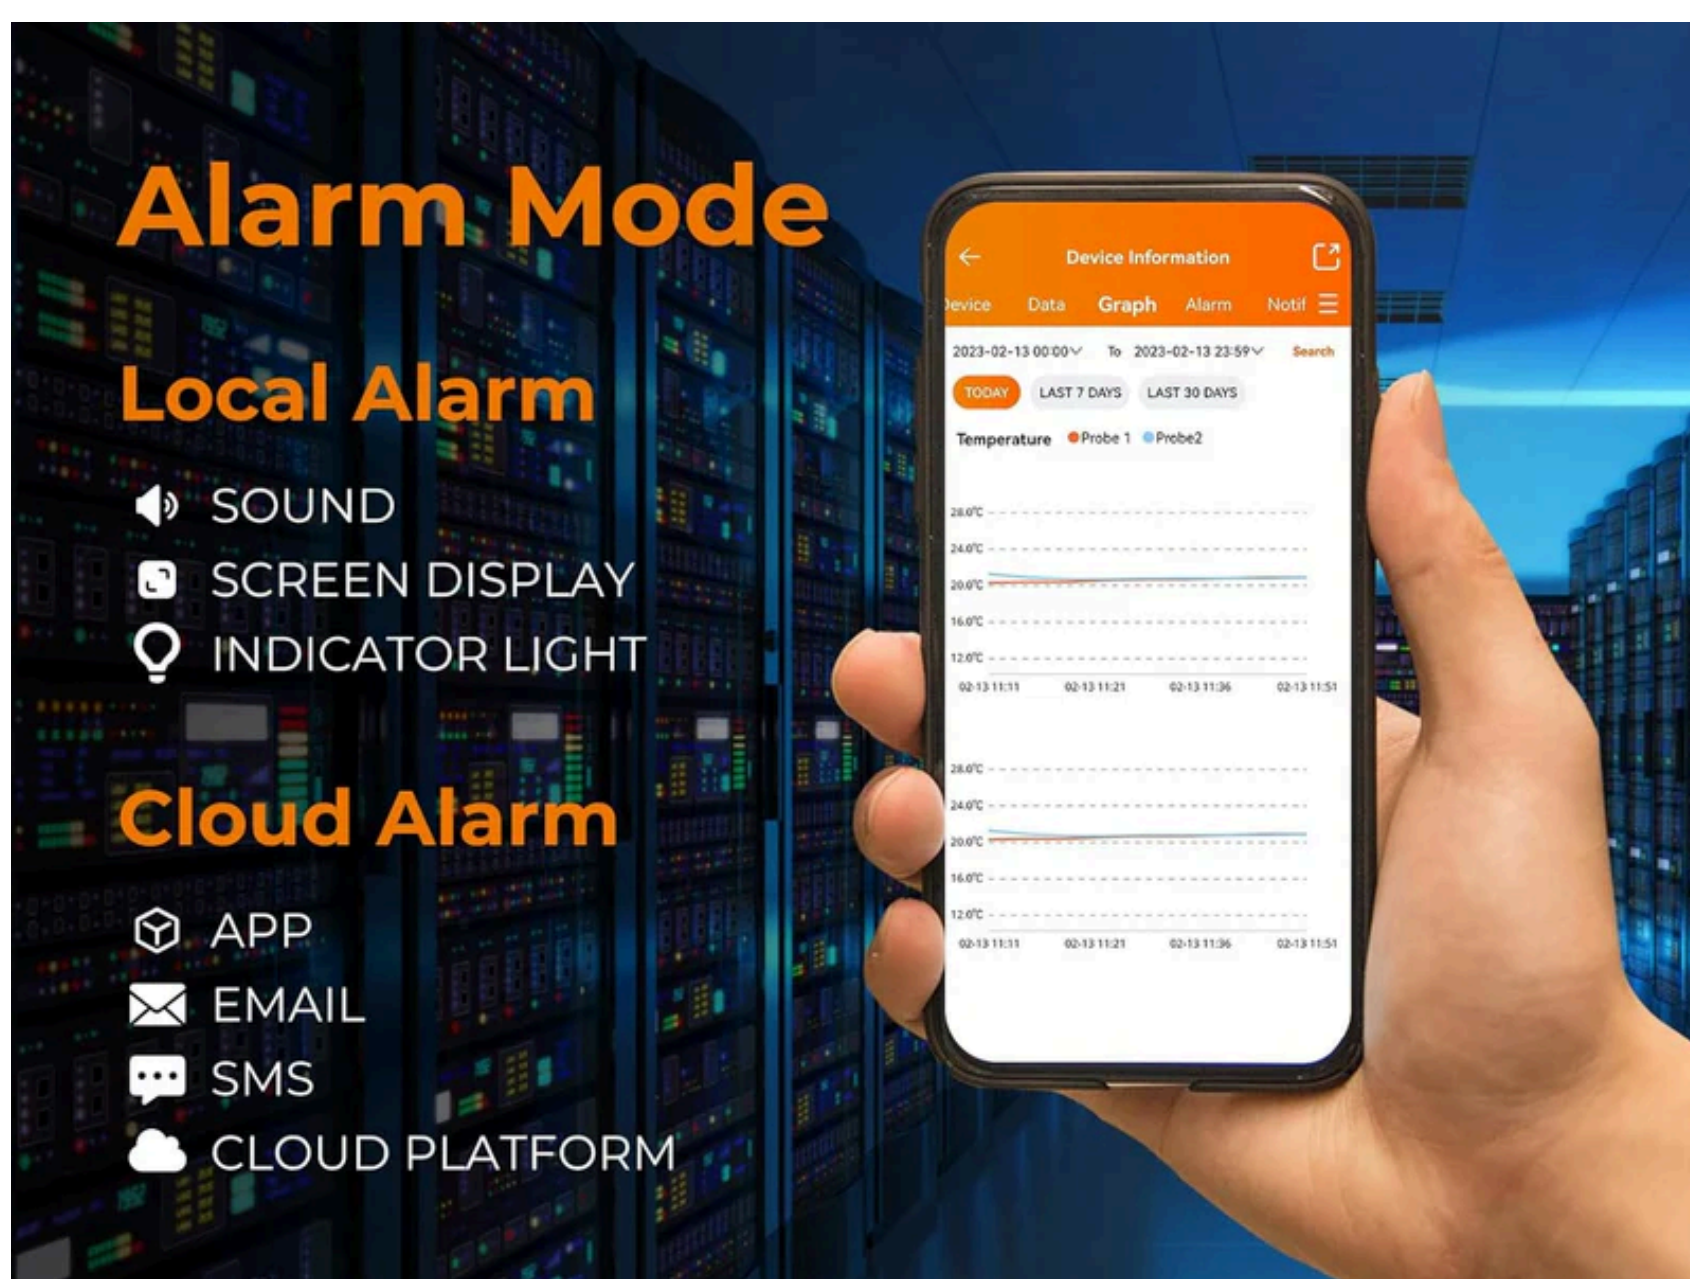

CONTACT US:

7806070680

lnvcorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com







# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

SKU: US-RCW-360Pro-4G-DC-1PCS

Categories; 4G/Wifi real-time data logger,

Tags: Digital Data Logger, WiFi Real-Time Temperature Humidity CO2

### Ideal Applications

Cold-chain monitoring for pharmaceuticals, vaccines, biologics


Food and beverage storage & logistics where

temperature/humidity/CO<sub>2</sub> need constant oversight

Warehouses, labs, server rooms, environmental monitoring of sensitive assets

Greenhouses, agriculture, or any environment where remote alerts and data logging are critical

Multi-room or multi-location monitoring using cloud platform & remote alerts

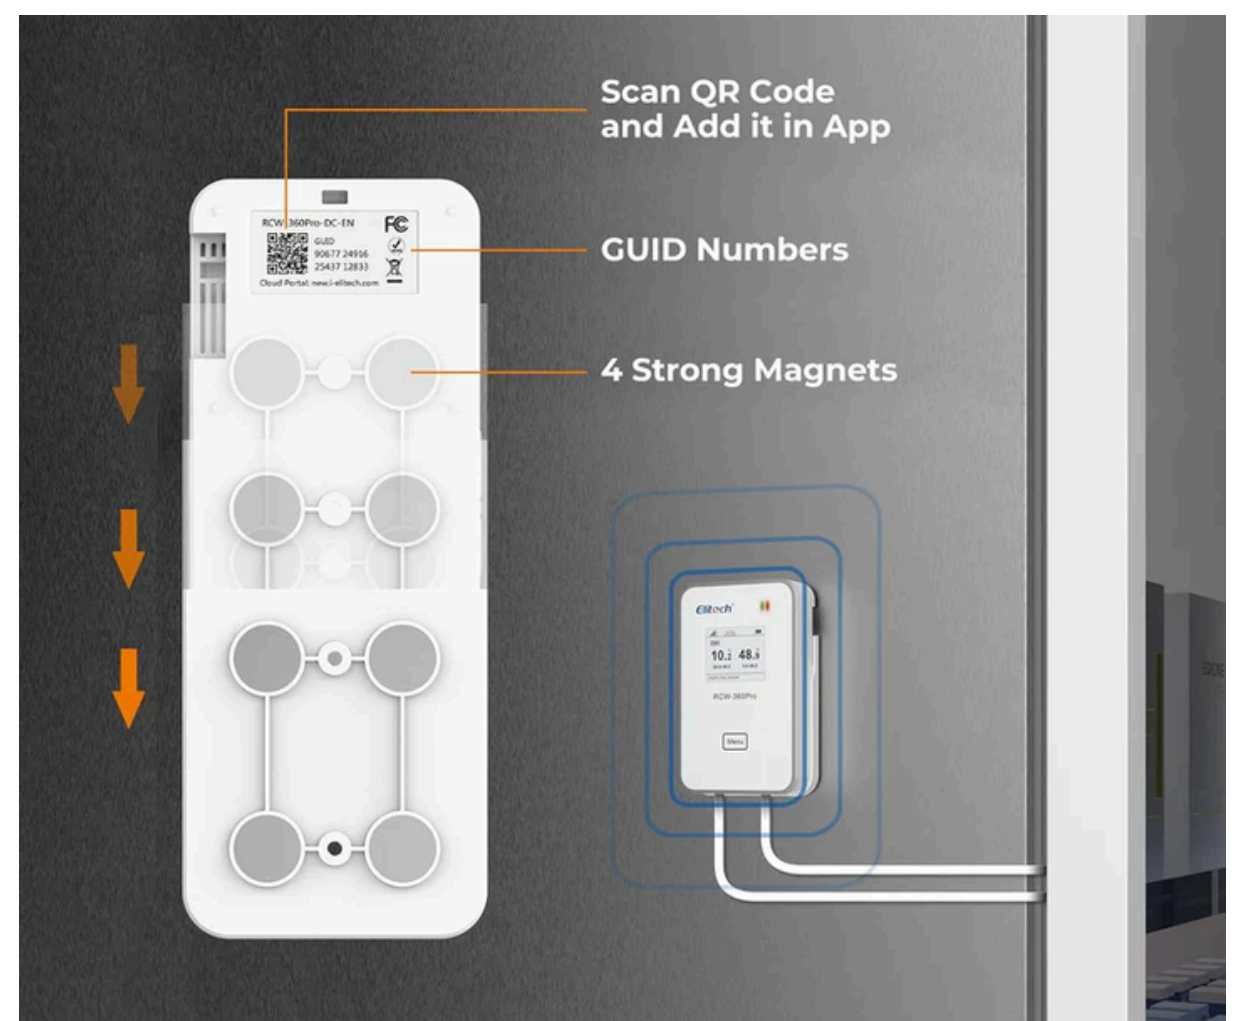

### Key Features

Real-time remote monitoring of temperature, humidity and CO<sub>2</sub> levels via 4G and/or WiFi connectivity — ideal for environments where immediate visibility and alerts are required. Elitech Technology, Inc.+2device.report+2

Large offline storage capacity: supports up to 100,000 data points in offline (circular) mode for uninterrupted logging even when network is unavailable. device.report+2Elitech Technology, Inc.+2

Dual external expansion channels: accommodates up to two external probes (various interchangeable probe types available) for flexible monitoring of multiple points/parameters. device.report+1

Supports cloud data storage, with remote access via web browser or mobile APP, and supports alarm notifications by SMS, email & app push. Elitech Technology, Inc.+1

Replaceable probe system: The host logger accepts a range of interchangeable probe types (temperature only, humidity & temperature, CO<sub>2</sub>, ultra low temp etc) so you can tailor the monitoring setup to your application. Walmart.com+1

Built-in rechargeable lithium battery plus DC input for power-flexibility. Designed to maintain logging and data upload even through power interruptions. device.report+1

Compact and installation-friendly: small form factor (approx 110 × 70 × 23 mm) and easy mounting/design features.

EMIN.CO.TH+1

Rugged build: Protection rating IP64 (for external probe version) helping it handle non-ideal environmental conditions.

**CONTACT US:**

7806070680

lnvcorpbbhopal@gmail.com

www.lnvcorporation.in

www.lnvcorporation.com





# LVN CORPORATION


(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®



1

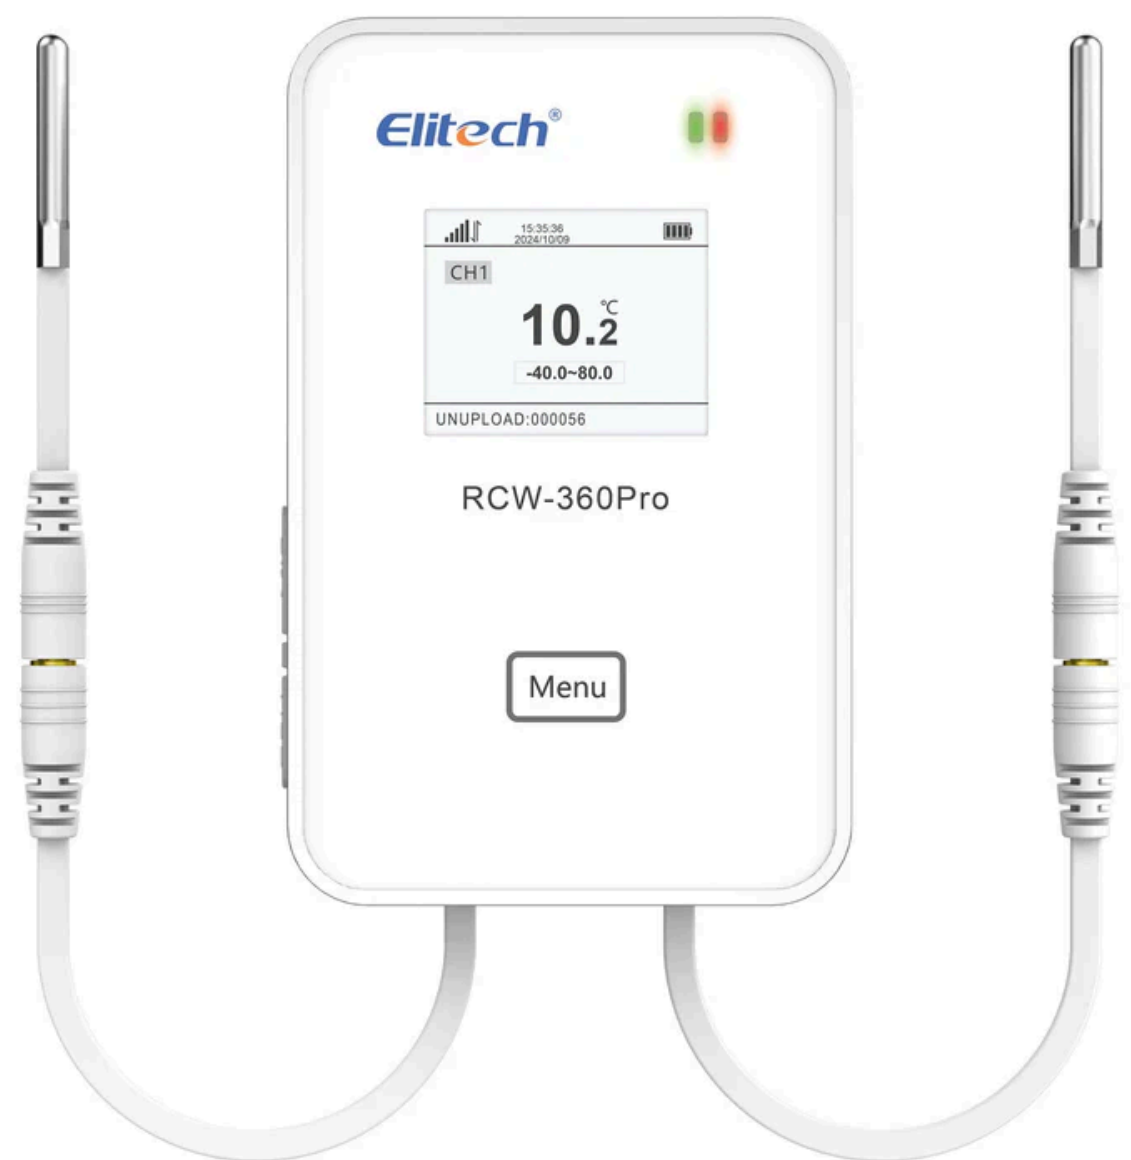

CONTACT US:

☎ 7806070680

✉ [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)







# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®



1



**CONTACT US:**

☎ 7806070680

✉ [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)







# LVN CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

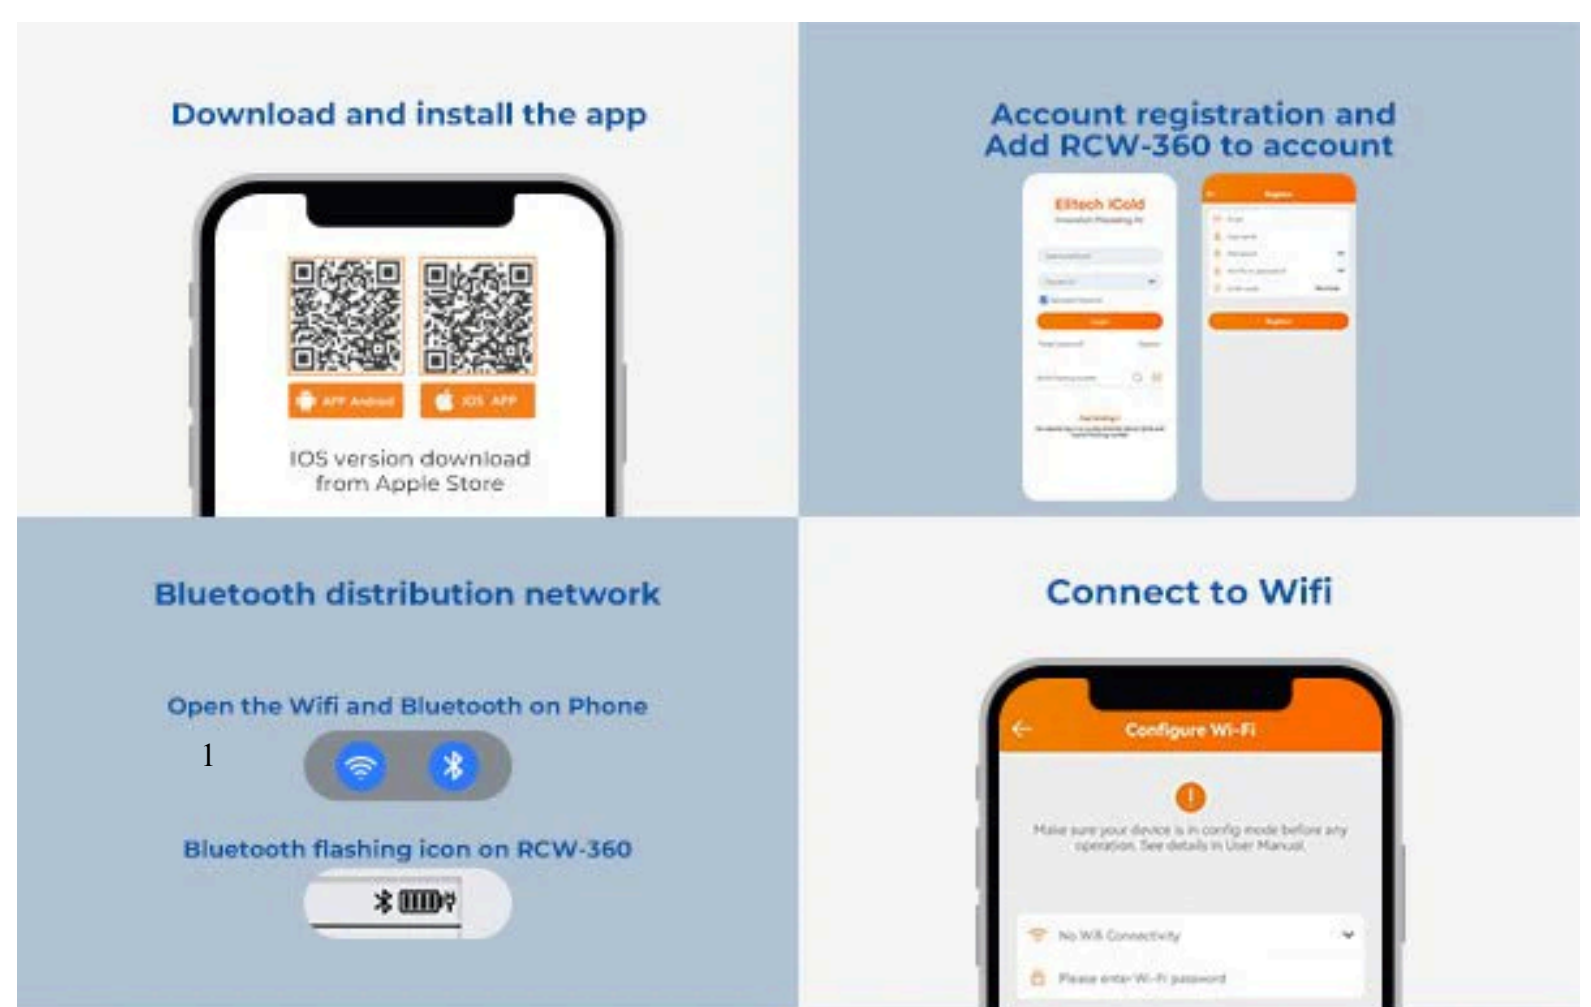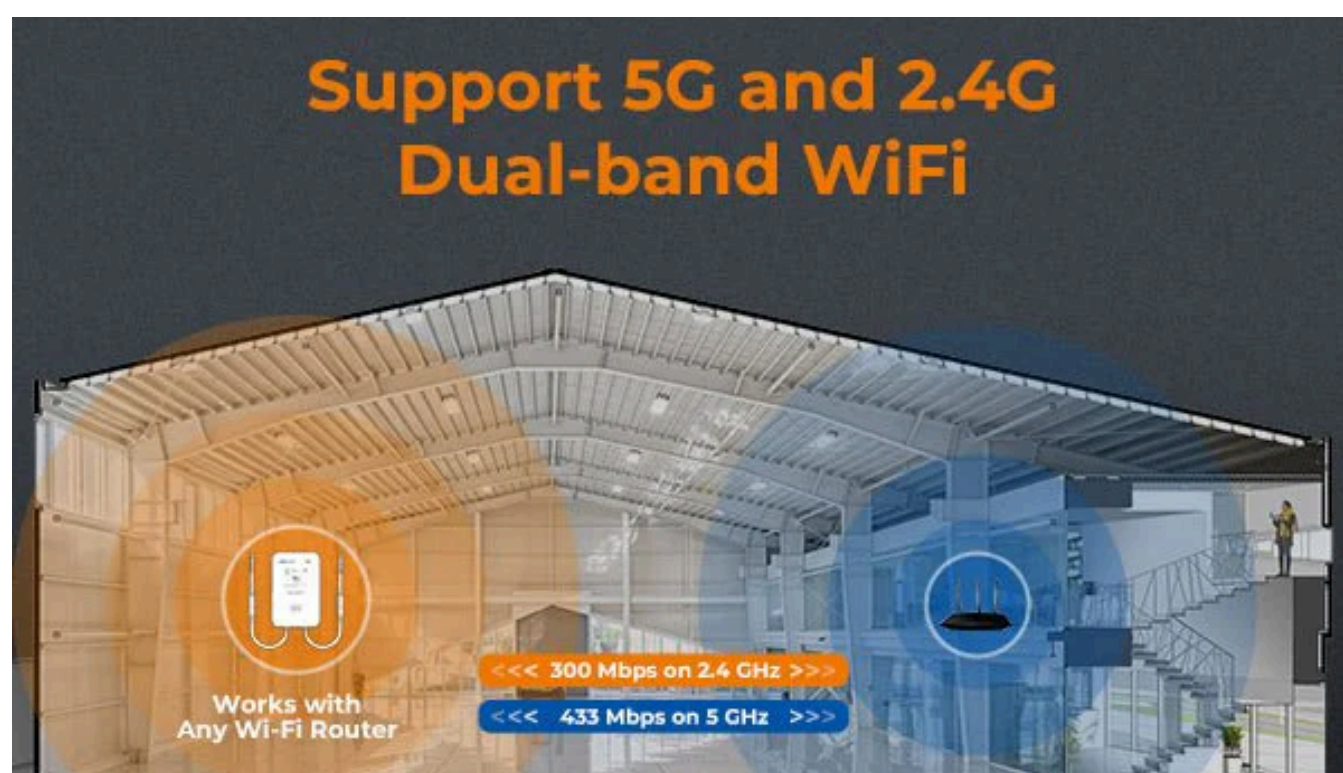

### • Why Choose RCW-360Pro-DC

- Ensures real-time alerts: When temperature/humidity/CO<sub>2</sub> drift out of safe range, you're immediately notified.
- Future-proof flexibility: The replaceable probe system means you don't need to buy a whole new logger if your measurement needs change.
- High data integrity: With 100,000-point offline memory and cloud sync capability, data loss due to network outages is minimised.
- Accessibility: Remote monitoring from anywhere via web/mobile helps centralised management of distributed sites.
- Reliability in challenging conditions: Built for industrial usage with protection rating and durable battery backup.
- One device for multiple environments thanks to dual-channel design.



**CONTACT US:**

☎ 7806070680

✉ [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)












# LNV CORPORATION

(A Complete Solution for Industrial & Health Care Products and Services )



## Elitech®

### Probe options are available

							
Probe type	Single temperature	Dual temperature	Gel bottle temperature	Temperature and humidity	Ultra low temperature	Low Concentration CO2	High Concentration CO2
Cable	5 Meters	5 Meters	5 Meters	5 Meters	3 Meters	2 Meters	2 Meters
Range	-40~80°C			T: -40~80°C H: 0~100 %RH	-200~150°C	400~5000 ppm	0~100 vol%
Accuracy	±0.5°C			T: ±0.5°C, H: ±5%RH	±0.5°C(-40~80°C) ±1°C(-80~100°C) ±2°C(Others)	±(100+5% reading)	±(1+3% reading)

### Technical Specifications

Alarm buzzer	Alarm occurs,sounding for 1 minute
Alarm Method	Local Alarm, Cloud Alarm (SMS, APP, Email)
Normal recording interval	1 minutes ~ 24 hours allowed, Default 5 minutes
Alarm recording interval	1 minutes ~ 24 hours allowed, Default 2 minutes
Normal upload interval	1 minutes ~ 24 hours allowed, Default 5 minutes
Alarm upload interval	1 minutes ~ 24 hours allowed, Default 2 minutes
Battery	Rechargeable 3.7V 4000mAH lithium battery
Battery Life	≥10days(@25°C, upload interval 5mins); ≥60days(@25°C, upload interval 30mins)

Software	For macOS & Windows system
Report Format	Automatic PDF report; PDF/EXCEL/TXT*via software
Offline Record	100,000 points
Protection Class	IP64
Logging Mode	Stop when full; Circular logging
Communication Method	4G(Without SIM card)
Working environment	-20~60°C,0~90% RH(non condensing)
Certification	Each probe has a calibration certificate, and the device does not with certificate.



**CONTACT US:**

☎ 7806070680

✉ [lnvcorpbbhopal@gmail.com](mailto:lnvcorpbbhopal@gmail.com)

🌐 [www.lnvcorporation.in](http://www.lnvcorporation.in)

[www.lnvcorporation.com](http://www.lnvcorporation.com)